

Teamsonic Industrial Co., Ltd.


Specification of Plastic mylar speaker

our P/No.	P1015MG1-W2	Size	10 x 15 mm
-----------	--------------------	------	-------------------

Test Items	Rated Requirements	Test Conditions
1. Shape	Oval	
2. Type	mylar speaker + wires (L = 60 mm)	Plastic frame
3. Voice Coil Imped.	$8 \Omega \pm 15\%$	at 1.5KHz 1.0 V
4. Resonance Freq.	$1.2K \pm 200$ Hz	without Baffle
5. Output S. P. L.	101 ± 3 dB at 2.0 KHz	0.5 W/ 5 CM distance
6. Rated Freq. Resp.	1.0K - 20K Hz	
7. Distortion	Max. 10% at 1.0KHz 0.5 W	
8. Rated Input Power	0.5 W	
9. Max. Input Power	1.0 W	
10. Net Weight	2.0 g	
11. Baffle Opening	7.8 x 12.8 mm	

Object & Drawing:

Unit: mm

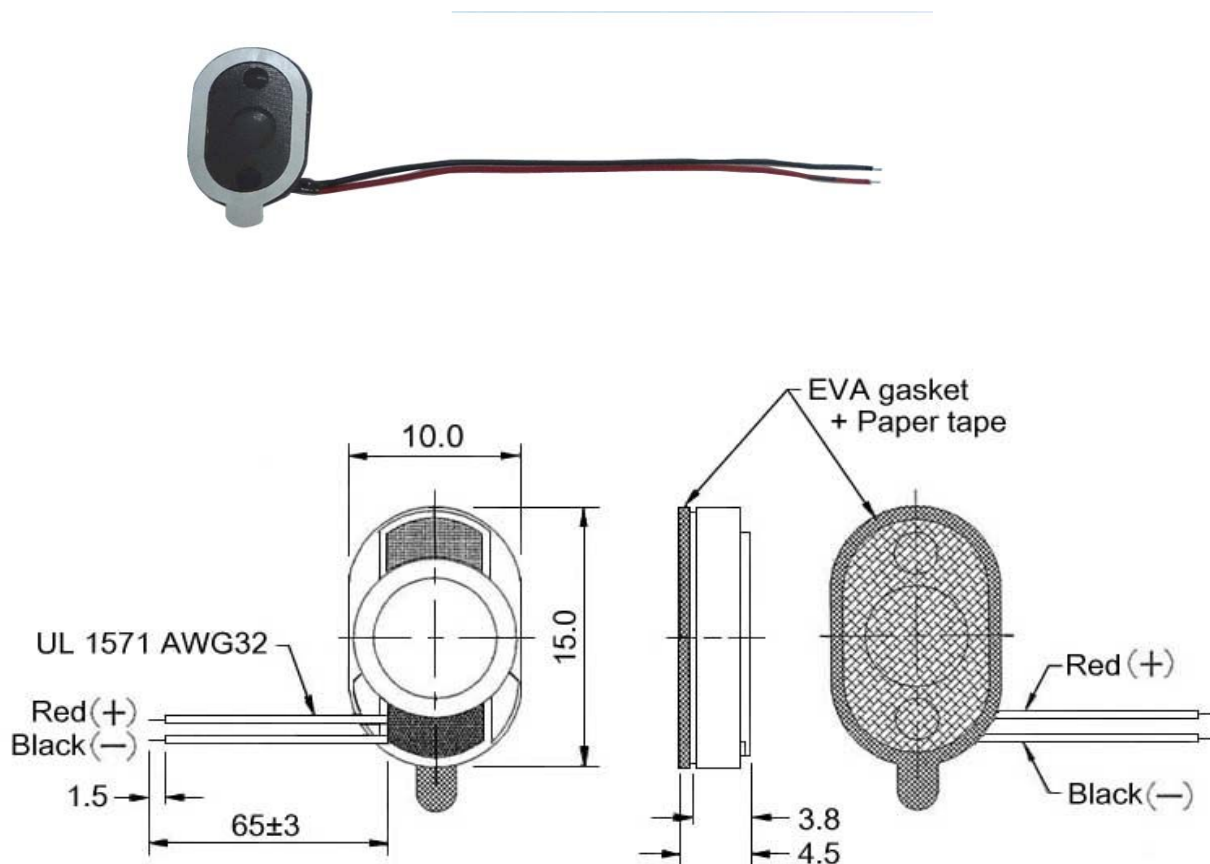

ESC End

D R A S Frequency Response

1 08.05.10610:31

Distance Loudsp.- Mic.: 5 cm

ID: NoName

